

ACTIONPOWER

High Power DC Source & Load

Titan DC series

12V to 2000V, 300kW to 10MW



Programmable Bidirectional DC Power Supply

actionpowertest.com

HIGH POWER CAPACITY WITH PARALLEL OPERATION

With 300kW - 1MW of unit capacity, the total capacity can be expanded up to 10MW by parallel connections.

2000V
MAXIMUM
DC OUTPUT
VOLTAGE

10MW
MAXIMUM
DC OUTPUT
POWER


MULTI-
OUTPUT
MODE

Multiple DC power supply cabinets can individually operate in single mode to configure multi-channel output, or in Master/Slave mode to configure single-channel output with combined capacity.



SIMULATION FUNCTION WITH HIGH PERFORMANCE

Titan DC series provide real-time battery and PV simulation function with fast response time of less than 1 ms.

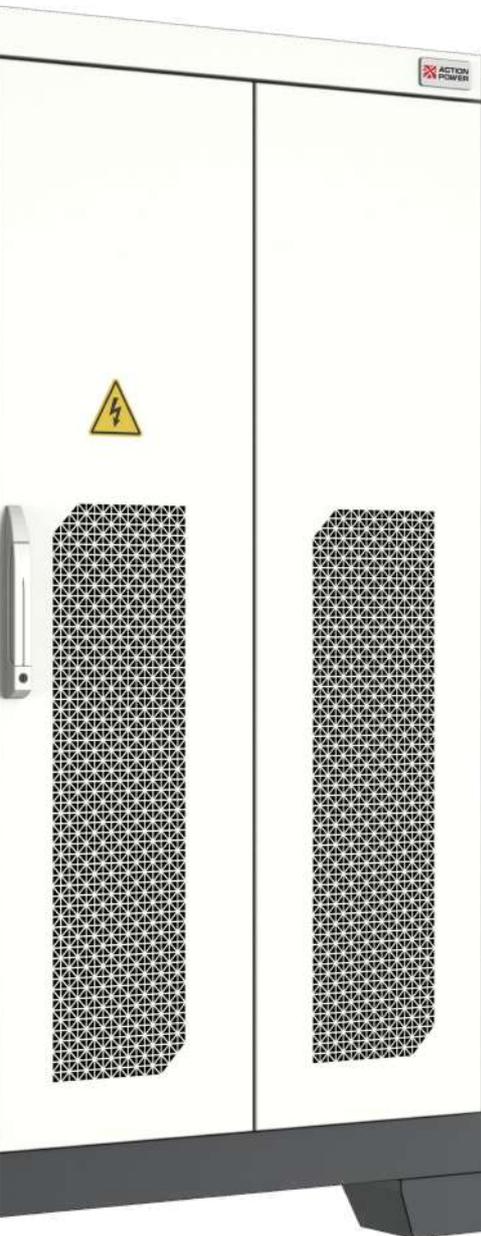

**BATTERY
SIMULATION**

**PV
SIMULATION**

**ELEC-
TRONIC
LOAD**


Titan DC series provide grid-regenerative DC electronic load function, which is applicable for testing fuel cell stack or fuel cell engine system, etc.

Ratings, types and voltages

Titan DC series

Model	Power [kW]	Output Voltage [V]	Output Current [A]	Size (WHD) [mm]	Weight [kg]
TD300-1K2-10	±300	12-1200	±1000	2010x1955x1200	2,640
TD400-1K2-10	±400	12-1200	±1000	2010x1955x1200	2,850
TD500-1K2-12	±500	12-1200	±1250	2010x1955x1200	3,020
TD600-1K2-12	±600	12-1200	±1250	2410x1955x1200	3,500
TD300-2K0-04	±300	20-2000	±400	1610x1955x1200	1,900
TD400-2K0-06	±400	20-2000	±600	1610x1955x1200	2,430
TD500-2K0-07	±500	20-2000	±700	2010x1955x1200	2,670
TD600-2K0-08	±600	20-2000	±800	3410x1955x1200	3,500
TD750-2K0-10	±750	20-2000	±1000	3410x1955x1200	4,390
TD1K0-2K0-14	±1000	20-2000	±1400	3410x1955x1200	4,940

Titan DC 300kW

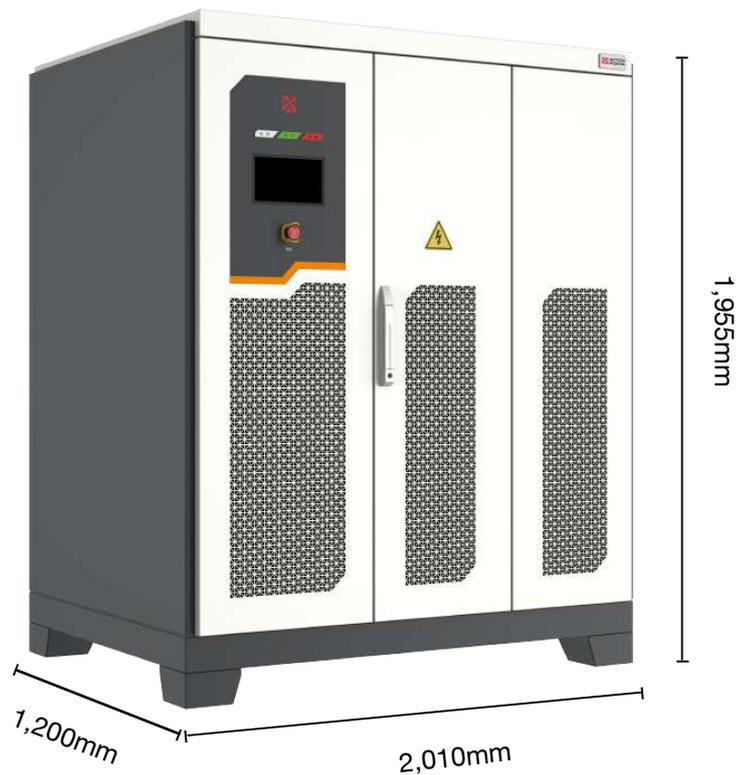

Technical data


Titan DC series		Specification
AC Input		
Voltage, Phases	380V±15%, 3ph+PE	
Frequency	47Hz to 63Hz	
Power factor	0.99 @ full load	
Efficiency	Model of 300kW and above : >94%, others: >90%	
Harmonic current	≤3%	
DC Output Voltage		
Accuracy	±0.1% F.S.	
Resolution	0.01V	
Ripple(RMS)	0.1% F.S. (resistive load)	
Slew rate	200V/ms	
DC Output Current		
Accuracy	±0.1% F.S.	
Resolution	0.01A	
Ripple(RMS)	0.1% F.S. (resistive load)	
Slew rate	500A/ms	
Rise time	≤2ms (10%~90% rated current)	
Switching time	≤4ms (switching from -09% to +90%)	
Peak time	60s (1200V type)	
Measurement		
Voltage accuracy	±0.1% F.S.	
Voltage resolution	0.001V	
Current accuracy	±0.1% F.S.	
Current resolution	0.001A	
Power accuracy	±0.2% F.S.	
Power resolution	1W	
Protective Functions		
OVP	Over-voltage protection, adjustable 0 - 110% U _{Nominal} (±1% F.S.)	
OCP	Over-current protection, Adjustable 0V- ±110% I _{Nominal} (±1% F.S.)	
OPP	Over-power protection, range 0V ~ ±110% P _{Nominal} (±1% F.S.)	
OT	Overt-temperature protection	

Technical data


Titan DC series	Specification
Battery Simulation	
Battery type	Different battery types such as lithium manganate, lithium cobaltate, lithium iron phosphate, nickel-hydrogen, ternary lithium, lithium titanate, and lead-acid batteries can be simulated User-defined battery types and open first, second and third-order RC battery models are supported
Parameter	Number of batteries in series connection, number of batteries in parallel connection, initial SOC, initial temperature, internal resistance, cell capacity and other parameters
Interface	Import of CSV user-defined model is supported
Real-time performance	1ms command refresh rate
Interface	
Ethernet, CAN, RS485	
Device Configuration	
Parallel operation	Up to 10MW
Insulation and Withstanding Voltage	
10MΩ/DC500V ; 3600VAC(5000VDC)/1min	
Environmental Conditions	
Operating temperature	-10 to 40°C
Storage temperature	-20 to 70°C
Relative humidity	10 to 90% RAH
Altitude	≤2000m without derating, Above 2000m please contact ACTIONPOWER
Cooling Method	
Air-cooled	Dry clean air
Option	
Discharging resistor cabinet	Under abnormal operating conditions of the system, energy will be safely dissipated through the bleeder resistor cabinet to protect the DUT
Capacitance compensation	Voltage drop caused by cable impedance and the voltage ripple of the DUT

High Power Scalable Design


The Titan DC series support multi-unit parallel operation and adopts high-speed fiber optic communication technology, featuring strong anti-interference capability and zero latency. The system supports expansion up to 10MW by connecting in parallel in 1MW increments from 300kW minimum. It enables multi-position, high-capacity, and multi-voltage level test setups, significantly improving testing efficiency for customers. In particular, the parallel-connected panels can be used in multi-output mode by separating the outputs according to the user's needs, allowing multiple test equipment to be tested at the same time, maximizing user convenience and saving a lot of costs.

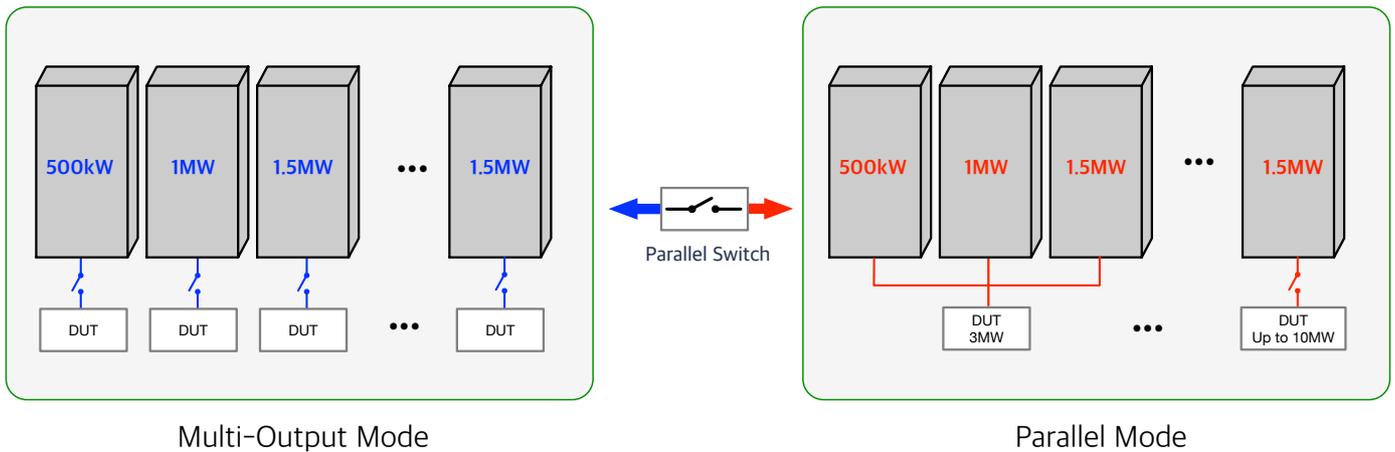

Auto Ranging

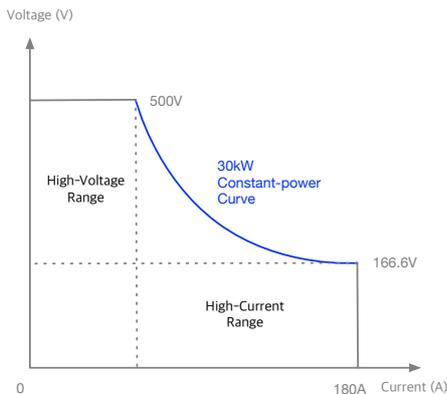

The auto ranging function automatically controls voltage and current through the programmable DC power supply to maintain the rated output over a wide operating range. That is the higher voltage is available at lower current, and vice versa, allowing the DUT to be tested under different voltage/current conditions with a single DC power supply.

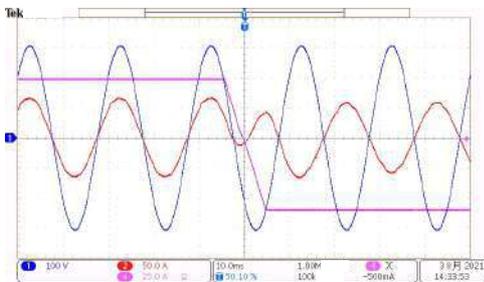

In addition, it supports smooth and ultra-fast automatic switching with the bidirectional Automatic “source” & “load” function. The overshoot of voltage or current can be effectively controlled without any delay in the transition between the two states of source and load.

CV/CC Priority Setting Function

CV (constant voltage) priority / CC (constant current) priority mode can be selected and set.

Suppression of Overshoot with CC Priority Mode

With the Titan DC series power supply, the CC priority mode can effectively respond to load variations. This mode suppresses momentary current spikes when the load suddenly changes its resistance, thus ensuring stable protection for sensitive loads.

Configuring the power supply in CC priority mode allows for voltage adjustment according to load changes, maintaining a stable current. This effectively protects sensitive loads such as high-power laser diodes and minimizes the risk of damage due to overshoot.




Current Overshoot in CV Priority Mode

In CV priority mode, the power supply prioritizes maintaining a constant output voltage. However, sudden load variations can cause momentary current spikes, posing a risk of damage to sensitive loads.

Therefore, configuring the ABS series power supply in CC priority mode enhances load stability and prevents damage caused by overshoot.

Application

ActionPower's high-capacity bi-directional DC power supplies are innovative products that are used in a variety of applications based on unique technology and optimal performance. ActionPower products can act as regenerative electronic load while providing bi-directional DC power, which is applicable of long-term reliability test applications such as electric vehicle DC charging stations, automotive battery charge and discharge tests, fuel cell discharge tests, ESS charge and discharge tests, and other applications requiring very fast response time, such as simulating electric vehicle driving patterns.

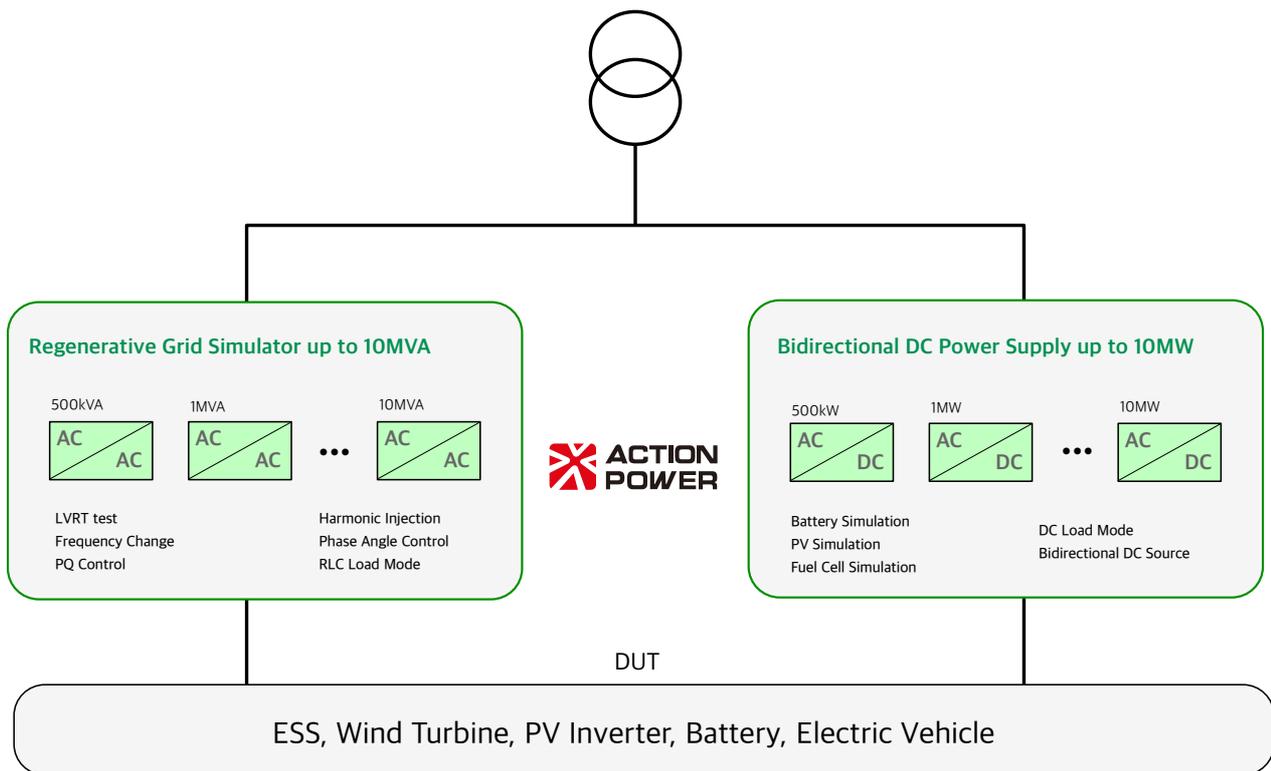


Powerful Software




Provides Diverse Simulation Modes


Basic Mode

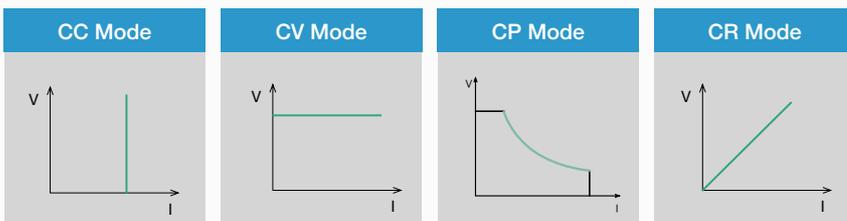

Dynamic Mode

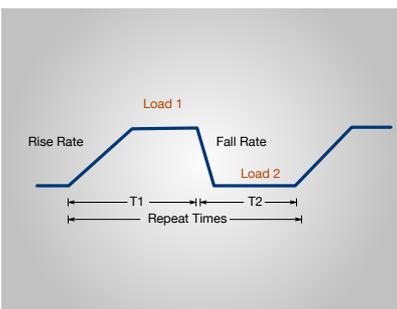

Programmable Sequences

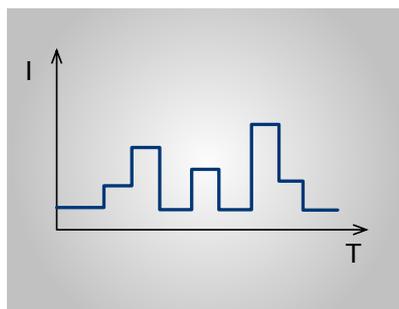


KEY FEATURES

- **Battery Simulation**
 LiMn204, LiCoO2, LiFePO4, NiMH,
 Ternary LI, LiTiO2 and PbO2 batteries
- **PV Simulation**
 Static curves, Curve programming,
 Static MPPT, Dynamic MPPT, Weather
 Simulation, Shading of photovoltaic
 panels
- **Electronic Load Function**
- **Programming Waveform**

Comprehensive Battery Simulation

It can simulate the output and charge/discharge characteristics of various battery packs such as lithium manganese, lithium cobalt, lithium iron phosphate, nickel-hydrogen, ternary lithium, lithium titanate and lead-acid batteries, and can set the parameters such as serial/parallel quantity, temperature, SOC, internal resistance and single battery capacity to simulate the output characteristics of the whole battery pack. The power supply opens first, second and third-order RC battery models and supports user-defined battery parameters and import of CSV user-defined model; the power supply has high real-time performance and the command refresh rate is as high as 1kHz, so as to comprehensively simulate the characteristics of the battery pack.

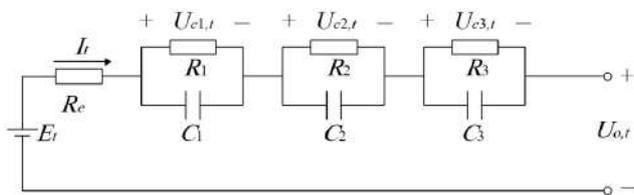


RCR Equivalent Circuit Model


Architecture	400 V
Nominal battery capacity	33.2 kWh
Usable battery capacity	27.2 kWh
Pack layout	96s1p (8 serially connected 12s1p modules)
Number of Li-ion cells	96
Rated cell voltage	3.7 V
Capacity per cell	94 Ah
Cell chemistry	NCM333

User-defined battery parameters



One battery cell format



Different cell chemistries

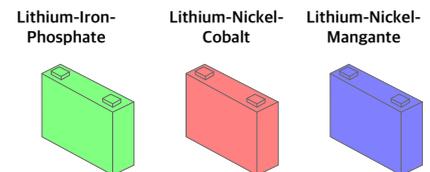

Modular platform -> scalable to configure batteries for various pack

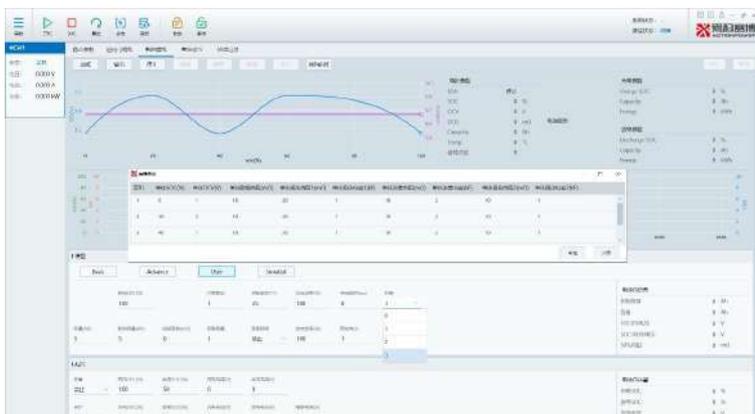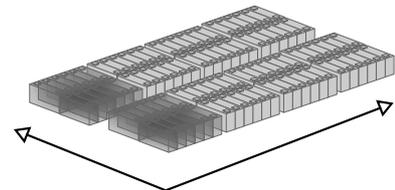

Battery Simulation Interface

KEY FEATURES


- DC Output Voltage : 12-2000Vdc
- Parallel Connection : up to 10MW
- Battery Simulation
LiMn204, LiCoO2, LiFePO4, NiMH, Ternary LI, LiTiO2 and PbO2
- High Dynamic : <2ms (10~90%)
- Voltage Slew Rate : 200V/ms
- ESS, UPS, EVE, etc. testing

PV Simulation

The Tian DC series is a product series featuring high precision, high dynamics and high-speed switching. With the complete I-V curve simulation function, it can simulate the output characteristics of various VP panels, and provide various kinds of user-defined curves, static and dynamic I-V curves and shadow occlusion simulations. The programming function can simulate different waveform outputs through three programming modes like Step, List and Wave, in order to fulfill the test requirements of various industries. The power supply can not only provide standard power supply environment for electrical equipment, but also receive the energy from load and feed it back to the grid, with feedback efficiency of above 94%, to save energy and improve the test environment.



Static MPPT Interface

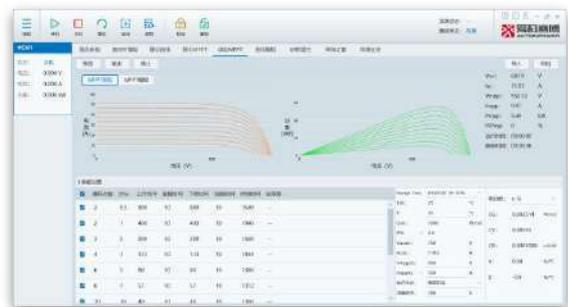



Dynamic MPPT Interface



Curve Programming Interface



Shadow I-V Interface

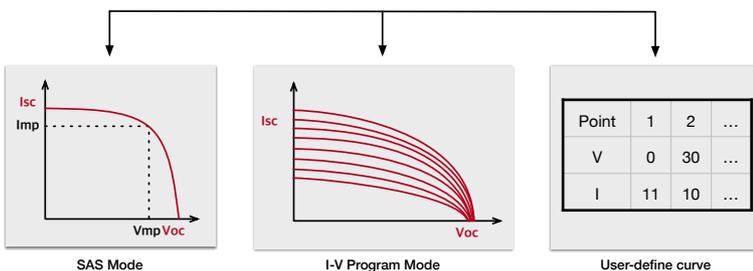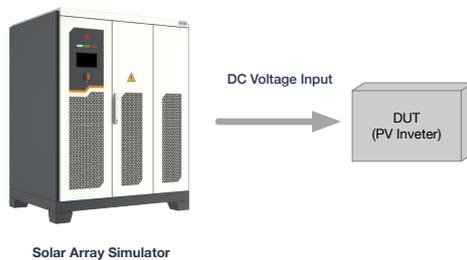


KEY FEATURES

- DC Output Voltage : 12-2000Vdc
- Parallel Connection : up to 10MW
- Complete I-V Curve Simulation
- High Dynamics : <2.5ms (10~90%)
- Voltage Slew Rate : 200V/ms
- Fast I-V Curve Switching : <100ms
- Shadow I-V curve simulation
- Built-in dynamic MPPT test profile Sandia, EN50530, CGC/GF004

Electronic Load

The series feedback DC electronic load is different from the traditional consumption load. It feeds back the absorbed electric energy to the power grid after transformation to save energy and improve the test environment. The product adopts full digital control technology, and has characteristics such as step-less adjustment, high accuracy, high dynamic performance and high reliability. It meets the requirements of low voltage and high current test, and can be applied to test scenarios such as fuel cell stack and fuel cell engine system.

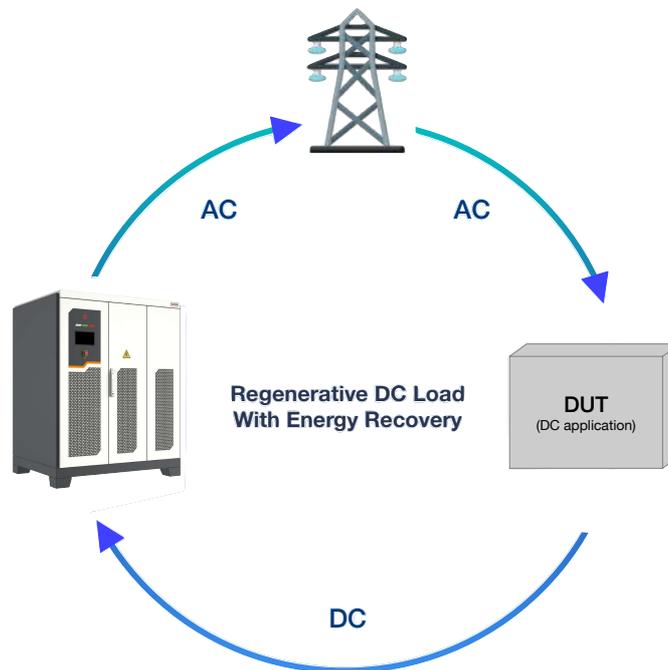

The series is regenerative DC electronic loads capable of absorbing current and efficiently feeding it back into the power grid. The AFL series achieves an impressive efficiency of up to 94%. The returned electrical energy can be reused by other equipment within the facility, resulting in savings in overall energy consumption and carbon emissions, reducing the environmental impact.

KEY FEATURES

- DC Output Voltage : 1200Vdc
- High Dynamics : <5ms (10~90%)
- Output slow start
- Low Harmonic Current: <3% F.S.
- Anti-revers function
- Online insulation impedance monitoring
- Discharging resistor
- Capacitance compensation

ACTIONPOWER

For more information, please contact
your local ACTIONPOWER distributor or visit

www.actionpowertest.com

© Copyright 2026 ACTIONPOWER. All rights reserved.
Specifications subject to change without notice.

Headquarters

No.3333 Run De RD., Chang An District, Xi'an Shaanxi, China 710119

info@actionpowertest.com

+86 (0)29-8569-1870



培宸科技股份有限公司
02-2995-2696
www.yuctech.com.tw
LINE ID : @678pknts

